


# TOMBO™ BRAND

## ENETHERMO™


Reusable heat insulation material

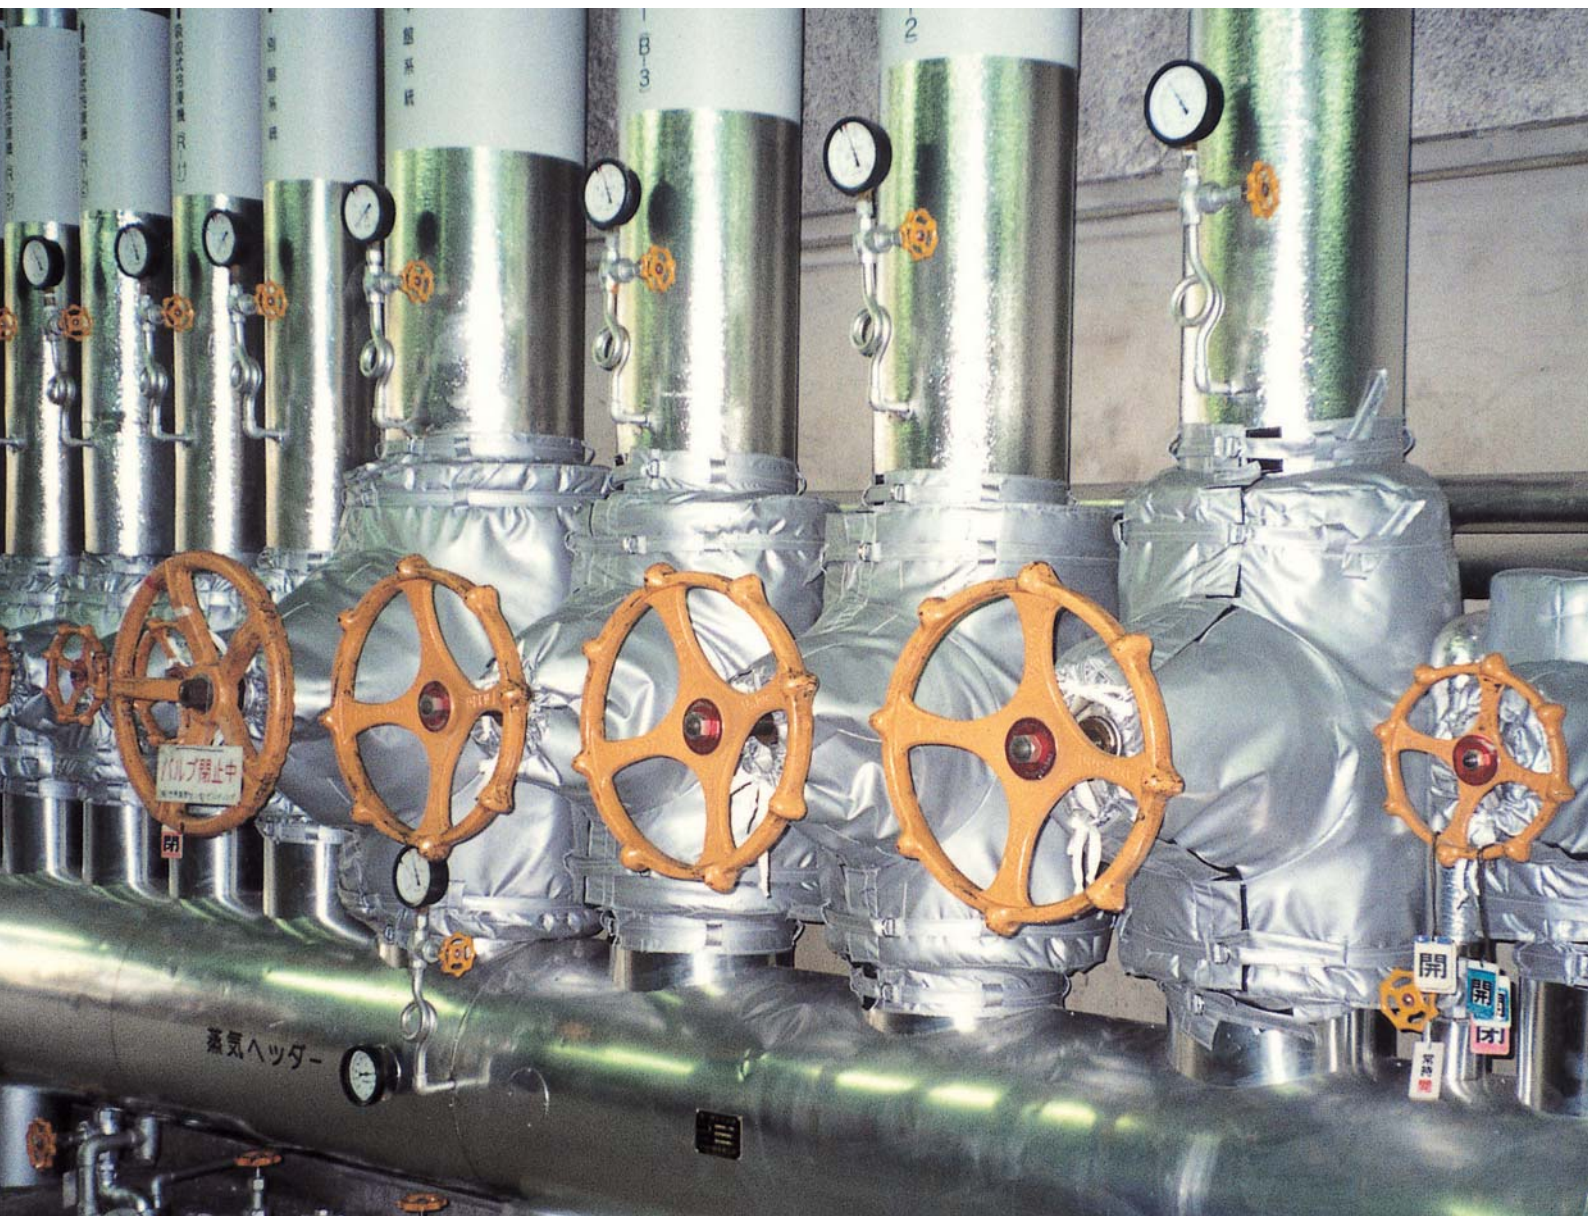

# TOMBO No.4500 ENETHERMO™ series

**Heat insulation material removable and reusable with ease.**

Installation of this material in buildings as well as factories in energy-saving objective lead to "Global environmental protection and improvement".

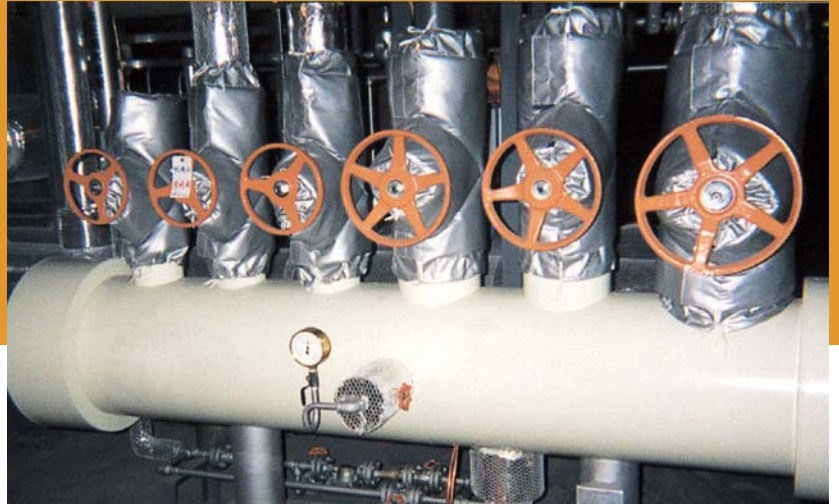

## Features

- Easy removability and detachability
- Reusable
- Maximum service temperature 250°C
- \* Material for higher temperature use beyond 250°C can be made as per your order

## Application

- Thermal insulation for valves, flanges, heat exchangers and vessels.
- Thermal insulation for towers and vessels
- Thermal insulation for heat radiation equipment.
- Thermal insulation for areas under regular repair and maintenance.

## Main material


- Outer material: Silicone coating glass cloth
- Inner material: TOMBO No.4517, Glass mat
- Inside material: Glass cloth
- Yarn: Glass fiber, Fluorine coated glass fiber

\* TOMBO is a registered trademark or trademark of NICHIAS Corporation.  
\* ENETHERMO is a trademark of NICHIAS Corporation.




- 1) Do not use ENETHERMO for any other purposes than described in the catalogue.
- 2) Never use ENETHERMO above the maximum service temperature specified in the catalogue (250°C).
- 3) ENETHERMO is made of glass fiber. Body contact with ENETHERMO could cause itching or pain to the skin, eyes, throat and/or nose.
  - Wear long-sleeved and loose clothes, protective gloves, goggles and a dust mask.
  - After handling ENETHERMO, thoroughly wash your hands with soap and warm water, and gargle your throat.
  - When cutting ENETHERMO, prevent dust from being scattered by bagging fragments immediately or by other means.
  - Wash working clothes separately from other clothing.
  - If pain or itching lasts a long time, consult a doctor for medical treatment.
- 4) For industrial hygiene-related precautions, see the SDS (Safety Data Sheet).
- 5) When disposing of ENETHERMO, follow your local laws and regulations concerning waste disposal.

Before installation

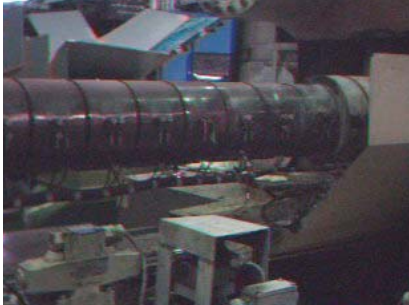

Average surface temperature:  
**Approx. 180°C**

After installation

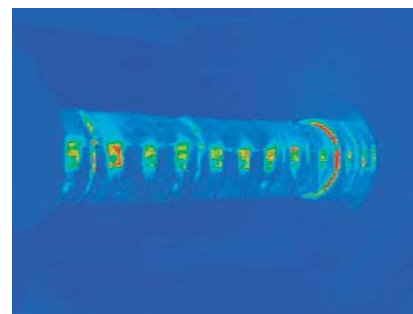

Average surface temperature:  
**Approx. 60°C**

### Example of calculation of energy-saving effect

The radiation heat loss is the sum total of the heat transfer by convection (Q1) and that by radiation (Q2), expressed as  $Q = Q1 + Q2$ . The radiation heat loss from a non-heat-insulated surface with average surface temperature of 180°C is as follows (assuming an outside temperature of 20°C and emissivity of 0.7):

$$Q=2850W/m^2$$

In the same way, the radiation heat loss from a heat-insulated surface with average surface temperature of 60°C is as follows (assuming an outside temperature of 20°C and emissivity of 0.9):

$$Q=513W/m^2$$

### Energy-saving effect

Based on the above calculation example, the energy-saving effect of ENETHERMO is: **2340W/m<sup>2</sup>**.

Specifically, if the annual operation time is 5000hr/year, unit cost of energy is ¥12/kWh, and installation area is 2m<sup>2</sup>, the savings are as shown below.


Power saving	Energy saving	Annual oil saving	CO <sub>2</sub> reduction
<b>23,400</b> [kWh/year per unit]	<b>280,000</b> [yen/year per unit]	<b>5.9</b> [kL/year per unit]	<b>13</b> [ton/year per unit]

\* The above figures are calculated based on heat simulations, and are not guaranteed.

\* If the machine has a metal cover, the radiation heat loss before installation is low, so the energy-saving effect may become one third to two thirds of the above.


\* The above data do not include the cost saving for air-conditioning. (If COP = 3, the above power saving value may be increased by approx. 1/3.)

Before installation

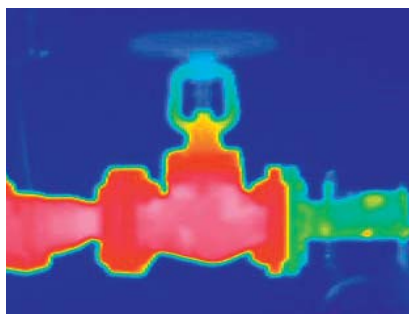

Average surface temperature:  
**Approx. 170°C**

After installation

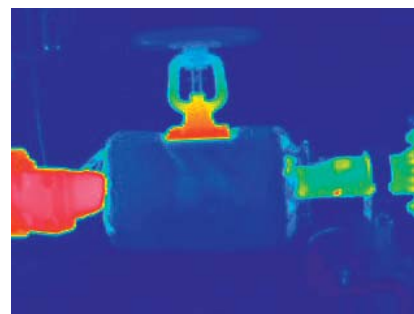


Average surface temperature:  
**Approx. 44°C**

### Example of calculation of energy-saving effect


The valve is operated under steam pressure of 0.8MPa and temperature of 170°C, and surface area of the 40A steam valve is converted 1.11m of the equivalent pipe length (surface area: 0.17m<sup>2</sup>).

Radiation heat loss from the non-heat-insulated steam pipe: **440W/m** (Fig. 1)

Radiated heat loss from heat-insulated (20mm thick cover) steam pipe: **59W/m (=0.47×(170-44))** (Fig. 2)

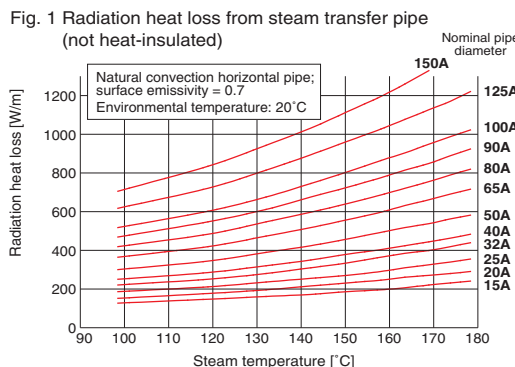

(Source: Data sheet in "Energy Conservation, special issue", Energy Conservation Center, Japan)

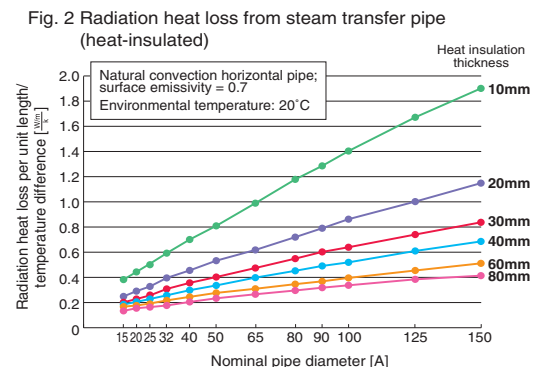

(Source: Data sheet in "Energy Conservation, special issue", Energy Conservation Center, Japan)

### Energy-saving effect

As indicated by the above calculations, the energy-saving effect is **423W/unit (= (440-59W/m) × 1.11m)**

Specifically, if the annual operation time is 5000hr/year, fuel oil A is ¥75/L and boiler efficiency is 80%:

Energy saving	Annual oil saving	CO <sub>2</sub> reduction
<b>18,300</b> [yen/year per unit]	<b>0.25</b> [kL/year per unit]	<b>0.66</b> [ton/year per unit]

\* The above figures are calculated based on heat simulations, and are not guaranteed.

TOMBO No.4500-CR

# ENETHERMO™ CR

Highly useful for improving the working environment in semiconductor manufacturing facilities, foodstuff factories and precision equipment plants where high cleanliness is essential.



Clean room

Widely used in clean rooms because of low dust generation (Class 1000).



For injection molding machines

Used for heat insulation of semiconductor manufacturing equipment, valves and heat radiating machines.

TOMBO No.4500-R

# ENETHERMO™ R

Standard type for indoor use with heat resistance of 250°C (maximum service temperature)




For boilers

Applicable not only to boilers and valves but to parts of various shapes.

TOMBO No.4500-W

# ENETHERMO™ W

Water-proof for outdoor use

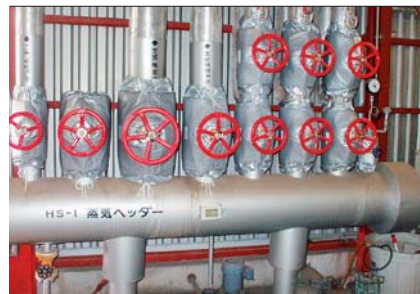

Although the seam is water-proofed, ENETHERMO W is not fully watertight.

## Installation procedure of ENETHERMO™ R (on globe valve, flange type, 65A)



1



2



3

Before installation



After installation



**Head Office**

6-1, Hatchobori 1-chome, Chuo-ku, Tokyo 104-8555, Japan  
**International Marketing and Sales Group**  
 Phone: 81-3-4413-1132 Fax: 81-3-3552-6108  
 Web Site: <http://www.nichias.co.jp/>

**Overseas Representative Offices**
**Malaysia**

**NICHIAS CORPORATION, MALAYSIA REGIONAL OFFICE**  
 Suite A1102, 11th Floor, West Wing, Wisma Consplant 2,  
 No. 7, Jalan SS 16/1, 47500 Subang Jaya, Selangor Darul Ehsan, Malaysia.  
 Tel : +60-3-5636-5778 Fax : +60-3-5636-5786

**Qatar**

**NICHIAS CORPORATION, QATAR REPRESENTATIVE OFFICE**  
 P.O. Box 200138, 7th Floor Pearl Tower, Al Matar Street, Doha, Qatar  
 Phone: +974-4498-7221 Fax: +974-4443-5495

**Overseas Sales Companies**
**Indonesia**

**PT. NICHIAS SUNIJAYA**  
 Panin Life Center, 2nd Floor, Room 205, Jl. Letnan Jenderal S. Parman  
 Kav. 91, Jakarta 11420, Indonesia  
 Phone: +62-21-56956207 Fax: +62-21-56956208/56956209

**Malaysia**

**NICHIAS FGS SDN. BHD. Kuala Lumpur Sales Office**  
 Suite A1102, 11th Floor, West Wing, Wisma Consplant 2, No.7, Jalan  
 SS 16/1, 47500 Subang Jaya, Selangor, Malaysia  
 Phone: +60-3-5636-4067 Fax: +60-3-5636-4078

**Singapore**

**NICHIAS SINGAPORE PTE. LTD.**  
 25 International Business Park, #01-15/17 GERMAN CENTRE,  
 Singapore 609916  
 Phone: +65-6571-0830/0838 Fax: +65-6265-7681

**Vietnam**

**NICHIAS VIETNAM CO., LTD**  
 R04, Fl.2, Newlife building, No.6 Nguyen Thi Thap Street,  
 Trung Hoa ward, Cau giay district, Hanoi, Vietnam  
 Phone: + 84-4-3791-7194 Fax: + 84-4-3791-6203

**Thailand**

**NICHIAS (THAILAND) CO., LTD.**  
 85 Moo 1, Wellgrow Industrial Estate T. Homsin, A. Bangpakong  
 Chachoengsao 24180, Thailand  
 Phone: +66-38-570-600 Fax: +66-38-570-601

**China**

**NICHIAS (SHANGHAI) TRADING CO., LTD.**  
 霓佳斯 (上海) 贸易有限公司  
 2109 Building A, City Center of Shanghai, No.100 Zun Yi Road,  
 Changning District, Shanghai, 200051, P.R.China  
 中国上海市长宁区遵义路100号虹桥上海城A栋2109室 邮编200051  
 Phone: +86-21-62361783 Fax: +86-21-62361781

**NICHIAS (SHANGHAI) TRADING CO., LTD. Guangzhou Branch**

霓佳斯 (上海) 贸易有限公司 广州分公司  
 17F-G, Gold Sun Building, No.109 Tiyu West Road, Guangzhou,  
 Guang Dong Province, 510620, P.R.China  
 中国广东省广州市天河区体育西路109号高盛大厦17楼G室 邮编 510620  
 Phone: +86-20-3879-1640 Fax: +86-20-3879-1647

**NICHIAS (SHANGHAI) AUTOPARTS TRADING CO., LTD.**

霓佳斯 (上海) 汽车零部件贸易有限公司  
 2108 Building A, City Center of Shanghai, No.100 Zun Yi Road,  
 Changning District, Shanghai, 200051, P.R.China  
 中国上海市长宁区遵义路100号虹桥上海城A栋2108室 邮编200051  
 Phone: +86-21-6236-2668 Fax: +86-21-6236-2667

**Overseas Construction Companies**
**Thailand**

**THAI-NICHIAS ENGINEERING CO., LTD.**  
 45 Huaypong-Nongbon Road, Huaypong, Muang Rayong,  
 Rayong Province 21150, Thailand  
 Phone: +66-38-682-242 Fax: +66-38-691-156

**Overseas Factories**
**Indonesia**

**PT. NICHIAS ROCKWOOL INDONESIA**  
**PT. NICHIAS METALWORKS INDONESIA**

**Malaysia**

**NICHIAS FGS SDN. BHD.**  
**NT RUBBER-SEALS SDN. BHD.**

**Vietnam**

**NICHIAS HAIPHONG CO., LTD.**

**China**

**SUZHOU NICHIAS INDUSTRIAL PRODUCTS CO., LTD.**

(苏州霓佳斯工业制品有限公司)

**SUZHOU NICHIAS SEAL MATERIAL CO., LTD.**

(苏州霓佳斯密封材料有限公司)

**SHANGHAI XINGSHENG GASKET CO., LTD.**

(上海兴盛密封垫有限公司)

**SHANGHAI GOYU AUTO PARTS CO., LTD.**

(上海五友汽车零部件有限公司)

**India**

**NICHIAS INDUSTRIAL PRODUCTS PRIVATE LTD.**

**Czech**

**NICHIAS Czech s.r.o.**


**Cautions**

- 1) The information and recommendation in this catalog are based on our present state of knowledge and given in good faith for customer guidance purpose, and no liability will be accepted in relation to the same.
- 2) Properties/applications shown in this catalog are typical. The products shown in this catalog shall not be used for any purpose other than prescribed application.
- 3) Performance data shown in this catalog are developed from in-house testing and/or field reports from customers. Failure to select the proper products could result in property damage and/or serious personal injury.
- 4) Performance verification under actual operating conditions is recommended even for the application shown in this catalog.
- 5) While the utmost care has been used in compiling this catalog, we assume no responsibility for errors. This edition cancels previous issues and contents of this catalog are subject to change without prior notice.
- 6) For safe handling recommendations and health related effects, refer to the material safety data sheet (MSDS) of each product, available on request.
- 7) All or any part of the content on this catalog may not be copied, duplicated, imitated, reused and reproduced without prior permission of NICHIAS Corporation.